
25-P305

Metal Offset Gate

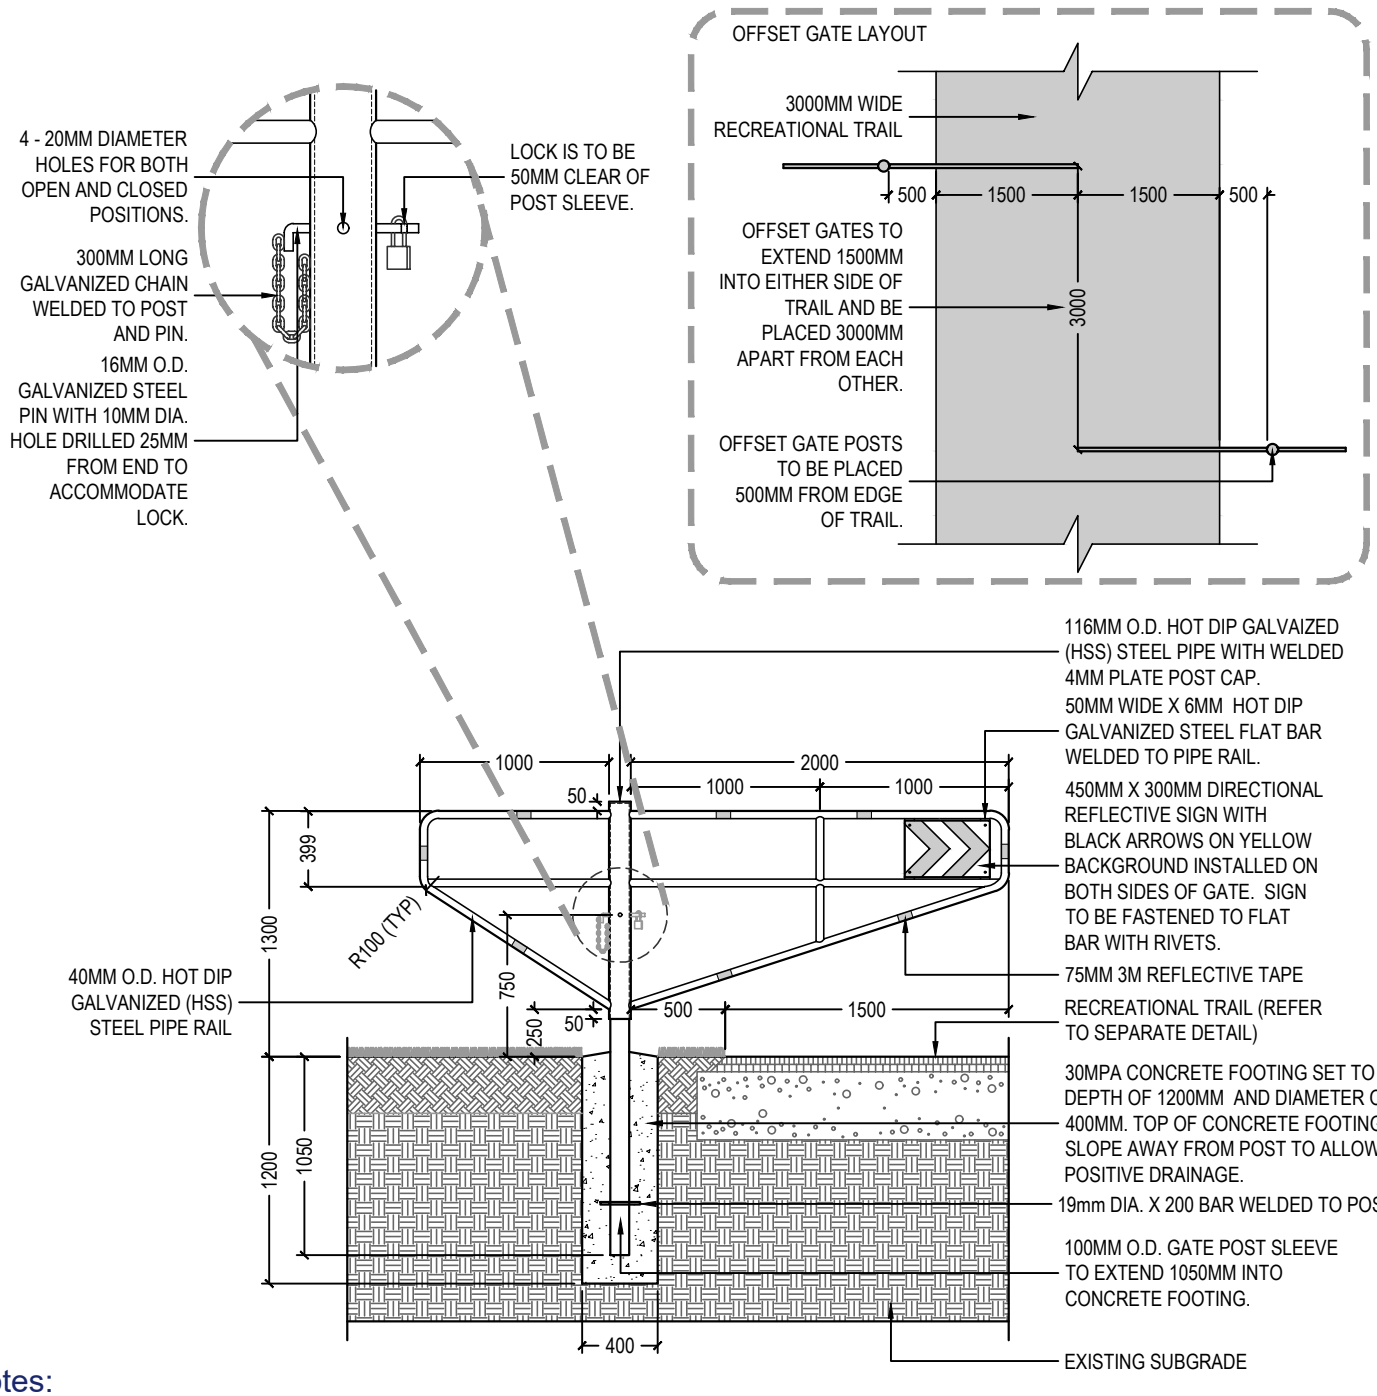

Notes:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. ALL GATE MATERIAL MUST BE HOT DIP GALVANIZED AFTER FABRICATION.
3. ALL 40mm DIAMETER PIPE MUST BE STANDARD SCHEDULE 40 NEW BUTT WELD PIPE.
4. GATE POST TO EXTEND A MINIMUM OF 1050mm INTO FOUNDATION SLEEVE PIPE.
5. PIN IS WELDED TO GATE WITH A 300mm LONG GALVANIZED CHAIN.
6. DIRECTIONAL SIGN TO BE A MINIMUM 1.5mm TK ALUMINUM OR GALV. METAL AND PLACED ON EACH SIDE OF GATE. SIGNS TO BE FASTENED TO GATE WITH RIVETS AT EACH CORNER.
7. ALL WELDING, GALVANIZING DRIPS AND SPATTERS TO BE REMOVED AND GROUND SMOOTH.
8. THE GATE IS TO BE STAKED IN THE FIELD AND APPROVED BY THE CITY'S REPRESENTATIVE.

Detail: 25-P305

Date: 2025-04-15
Revision Date: 2026-11-09

N.T.S.