


*LENGTH, WIDTH, AND DEPTH OF SOIL CELL SYSTEM
WILL VARY DEPENDING ON SOIL CELL LAYOUT AND
INFRASTRUCTURE CONSTRAINTS.

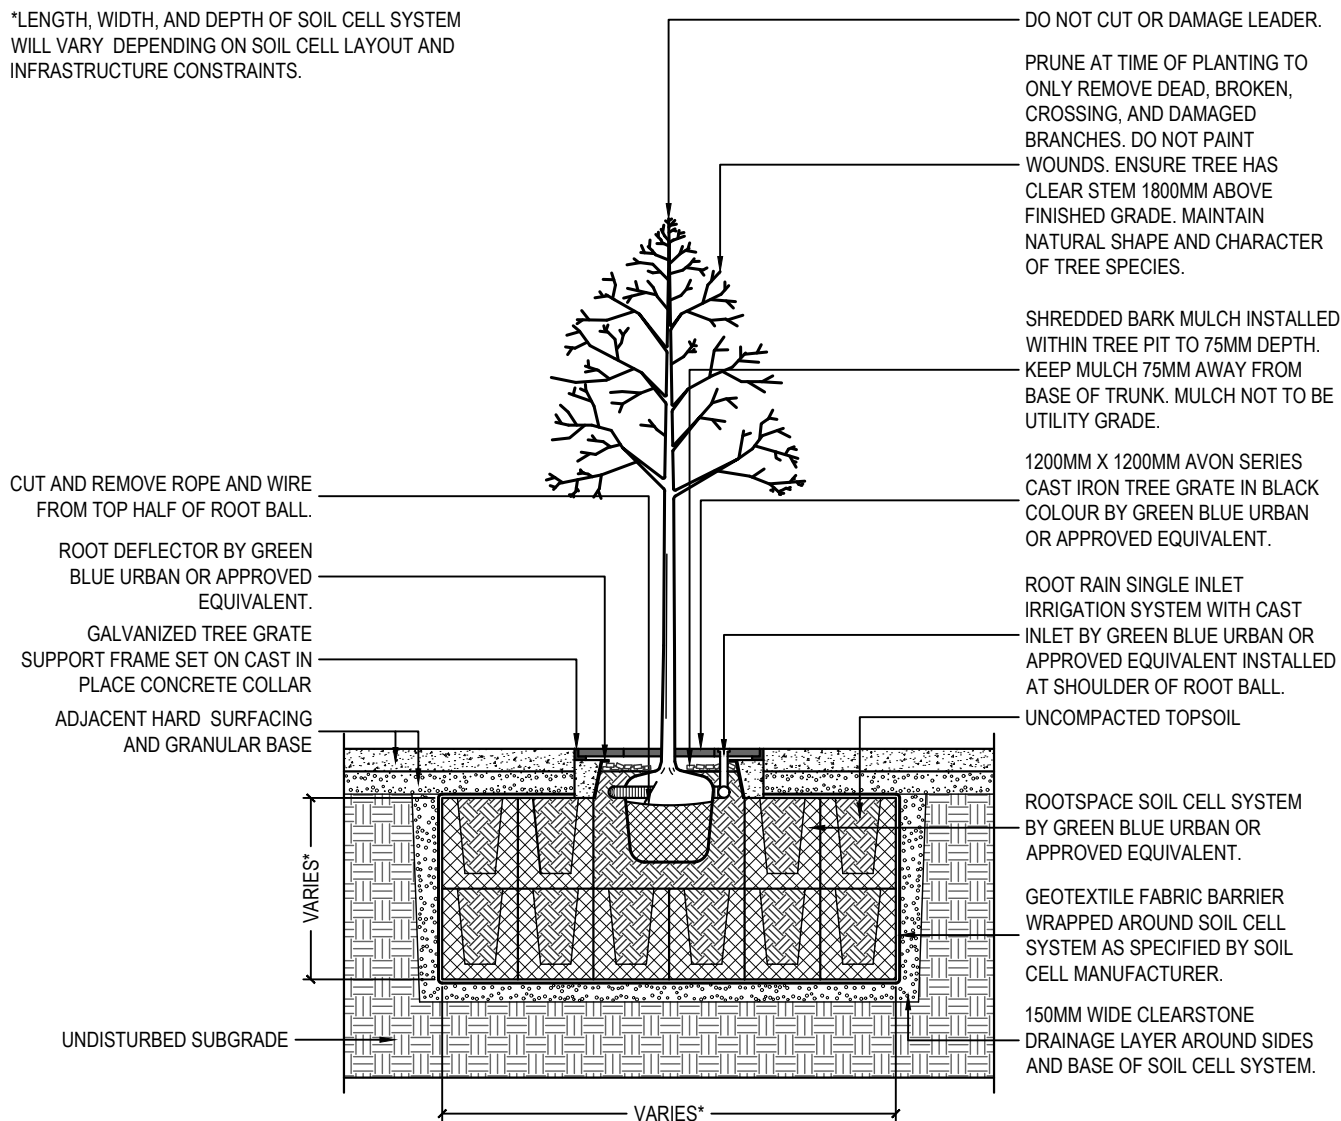

Notes:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. A MINIMUM OF 20 CUBIC METERS OF QUALITY TOPSOIL IS REQUIRED PER TREE AT TIME OF PLANTING. A MINIMUM OF 10 CUBIC METERS PER TREE IS ACCEPTABLE WHEN PLANTED IN SHARED PLANTING BEDS. SOIL CELL SYSTEMS ARE TO BE USED IN HARD SURFACING ENVIRONMENTS. STRUCTURAL SOIL IS NOT PERMITTED AS AN APPROVED ALTERNATE. TOPSOIL IS TO CONFORM TO THE CITY'S PARK DESIGN STANDARDS AND SPECIFICATIONS.
3. ALL PLANT MATERIAL TO CONFORM TO THE CANADIAN NURSERY STOCK STANDARD, LATEST EDITION, PUBLISHED BY THE CANADIAN NURSERY LANDSCAPE ASSOCIATION.
4. ENSURE TREES ARE THOROUGHLY WATERED AT TIME OF PLANTING. CONTINUE WATERING AS REQUIRED TO PROVIDE ADEQUATE MOISTURE TO THE TREE FOR THE DURATION OF THE SPECIFIED MAINTENANCE PERIOD.
5. REMOVE ALL TAGS, TAPES AND WRAPS IMMEDIATELY FOLLOWING FINAL INSPECTION.
6. ROOTBALL IS TO BE ANCHORED WITH 'ARBORGUY' STRAPPED ANCHOR SYSTEM BY GREEN BLUE URBAN OR APPROVED EQUIVALENT.