




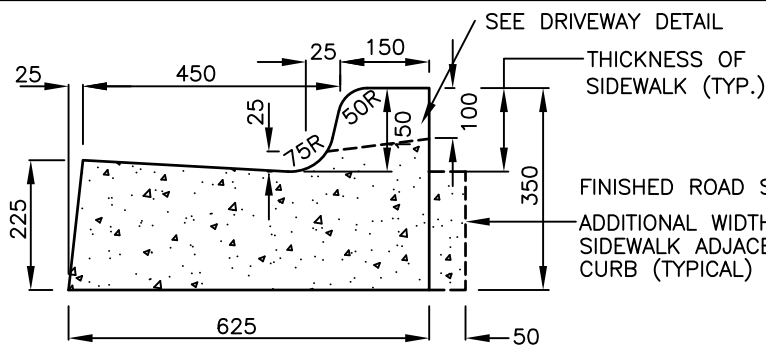


STANDARD CURB & GUTTER

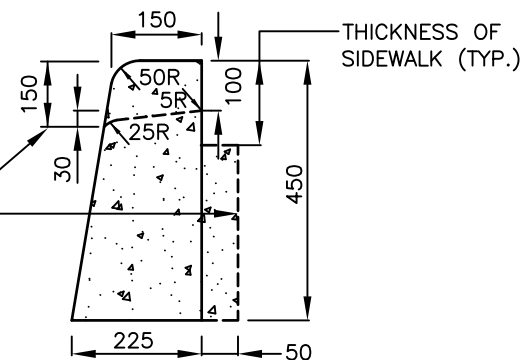

CURB SECTION ONLY

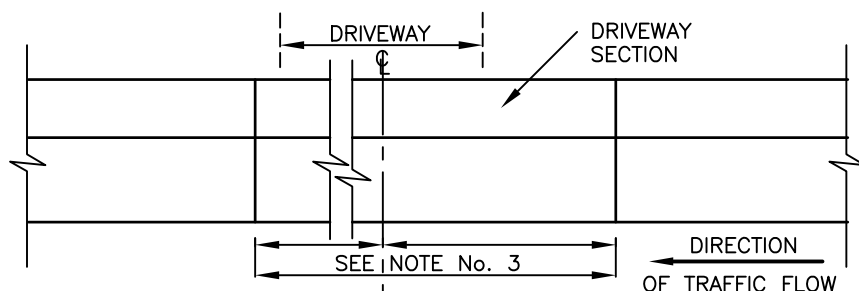


PLAN

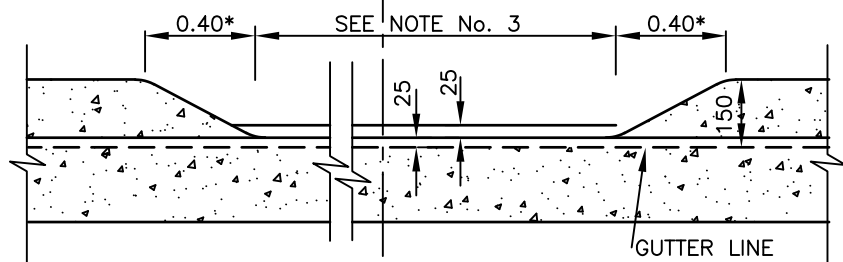


ELEVATION

DRIVEWAY DETAIL

*1.5m WHERE SIDEWALK IS ADJACENT TO CURB

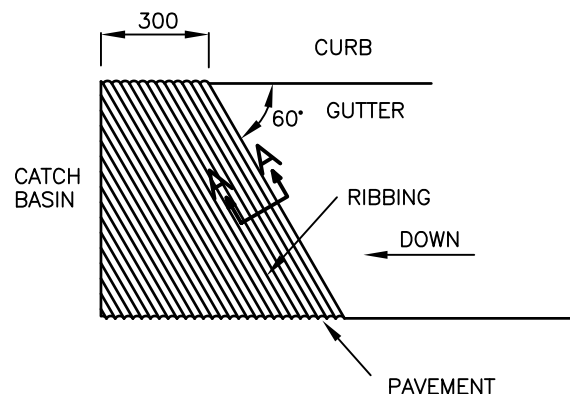

RIBBING FOR OVER 4% GRADE

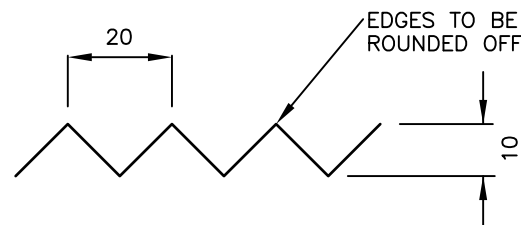

SECTION "A-A"

NOTES:

1. COMPRESSIVE STRENGTH OF CONCRETE TO BE 32MPa AT 28 DAYS.
2. CONTROL JOINTS (SAWCUTS) TO BE PLACED UNIFORMLY AT 3.0m INTERVALS. DRIVEWAY DEPRESSIONS SHALL HAVE TRANSVERSE JOINTS AT BOTH EDGES AND AT THE CENTRELINE.
3. WHERE SIDEWALK OR MULTI-USE PATH IS ABUTTING CURB, REFER TO OS-303.
4. RIBBING IN GUTTER AT UP GRADE SIDE OF CATCH BASIN WHERE THE ROAD GRADE IS GREATER THAN 4%.
5. FOR DRIVEWAY DEPRESSIONS REFER TO OS-320 & OS-321.
6. MEASUREMENTS IN METRES AND/OR MILLIMETRES UNLESS OTHERWISE SHOWN.

CITY OF OSHAWA

CHK'D: *S.S.*
APP'D: *S.H.*
DATE: APRIL 2024

CONCRETE CURB AND GUTTER
AND CURB SECTION ONLY

REVISION No. 3

DATE: APRIL 2024

OS-601