
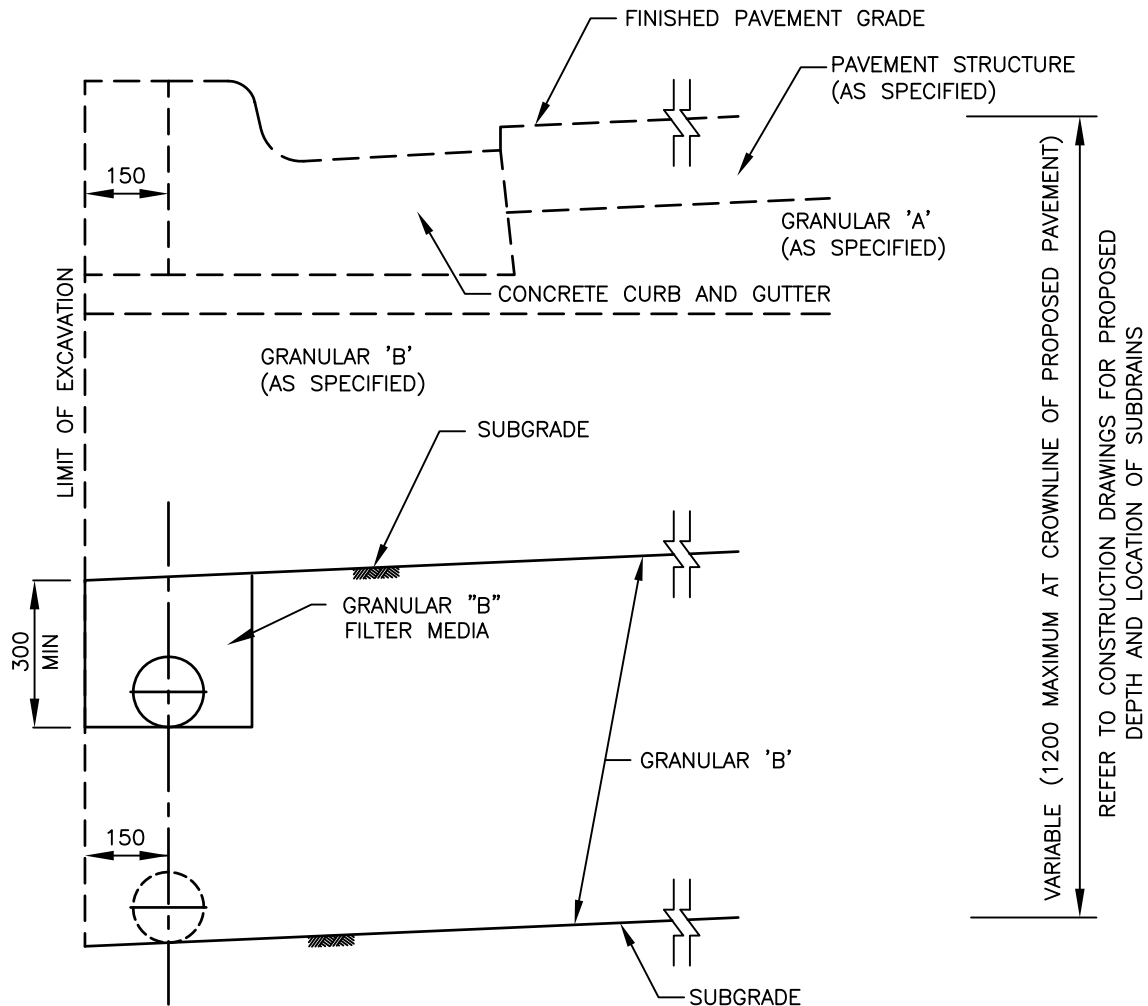


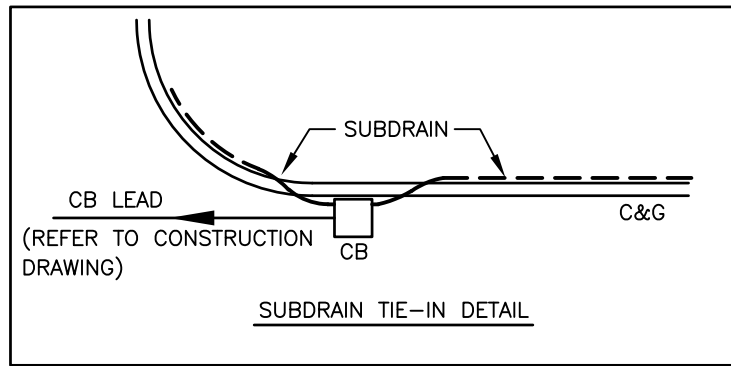

NOTES:

1. SUBDRAIN SHALL RUN PARALLEL TO CURB & GUTTER AND TIE INTO CATCH BASINS AT NEAR SIDE PARALLEL TO THE CURB & GUTTER (REFER TO DETAIL).
2. PIPE MATERIAL SHALL BE 150mm DIAMETER PERFORATED DUAL WALL POLYETHYLENE PIPE WITH SMOOTH INNER SURFACE HAVING A MINIMUM STIFFNESS OF 320 kPa. PIPE SHALL BE 'BOSS 2000' WITH FILTER SOCK AS MANUFACTURED BY BIG 'O' INC. OR AN APPROVED EQUAL.
3. FLEXIBLE PVC SUB-DRAIN CAN BE USED ON TIGHT CURVES AND RADII AT THE DISCRETION OF THE CITY.
4. MEASUREMENTS IN METRES AND/OR MILLIMETRES UNLESS OTHERWISE SHOWN.

CITY OF OSHAWA

CHK'D: *J.J.*

APP'D: *J.H.*

DATE: FEB 2, 2022

PERFORATED PIPE SUBDRAIN

REVISION No. 4

DATE: FEB 2, 2022

OS-220