

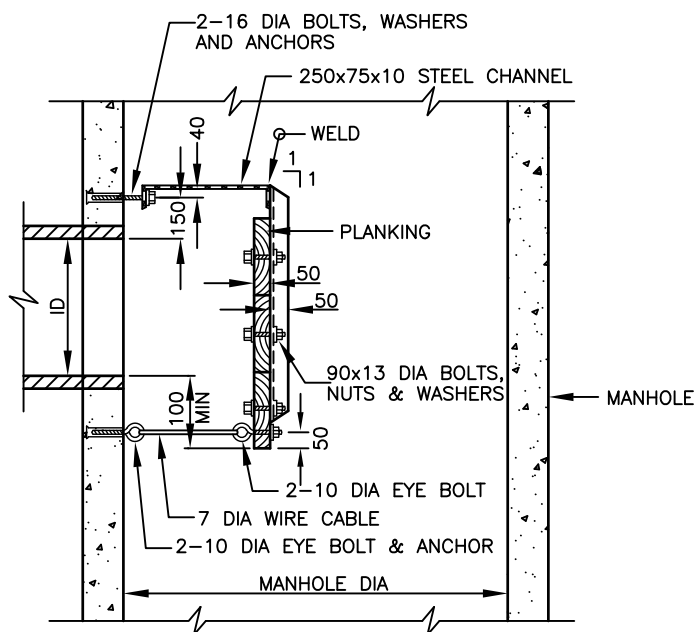


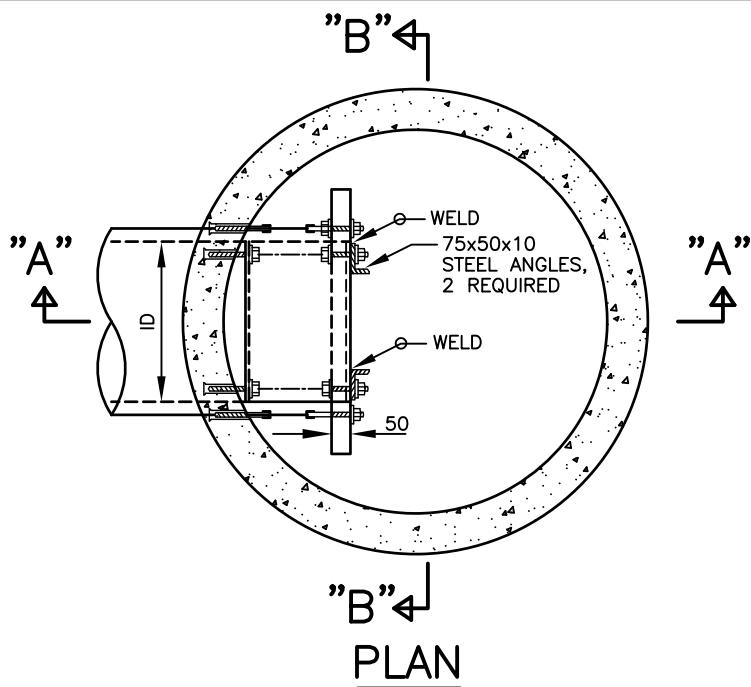

SECTION "A"—"A"

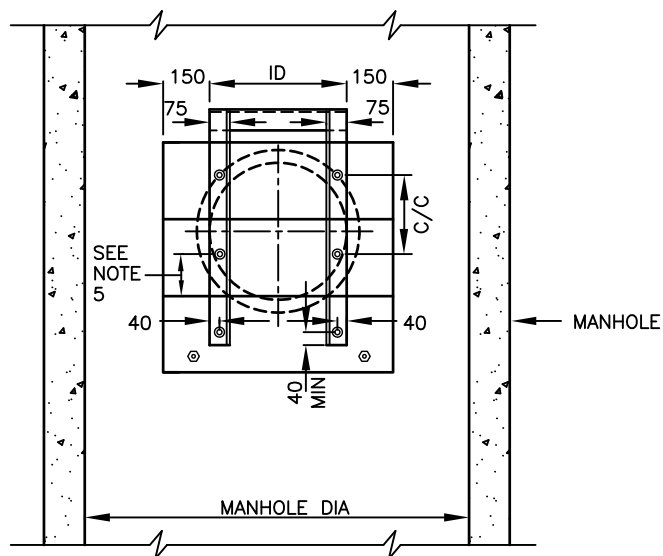

SECTION "B"—"B"

NOTES:

1. ALL PLANKING TO BE OF STRUCTURAL CEDAR AND TREATED WITH A WOOD PRESERVATIVE.
2. STRUCTURAL STEEL TO BE WELDED IN THE SHOP AND PAINTED WITH ONE COAT OF "HIGH BUILD" EPOXY PRIMER PAINT AND ONE COAT OF BLACK BITUMINOUS PAINT.
3. BOLTS, WASHERS AND EYE BOLTS TO BE CADMIUM PLATED. NUTS TO BE NYLON.
4. WIRE CABLE TO BE GALVANIZED.
5. BOLTS TO BE PLACED AT CENTRE OF PLANKS.
6. MEASUREMENTS IN METRES AND/OR MILLIMETRES UNLESS OTHERWISE SHOWN.

CITY OF OSHAWA

CHK'D: *S.S.*

APP'D: *G.H.*

DATE:  
JAN. 16, 2012

BAFFLE FOR MANHOLE

REVISION No. 1

DATE: JAN. 16, 2012

OS-710