



CURB

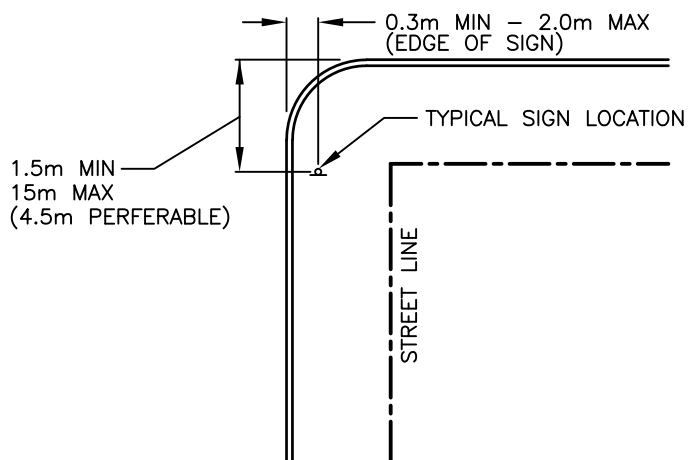

URBAN
WITHOUT SIDEWALK


CURB

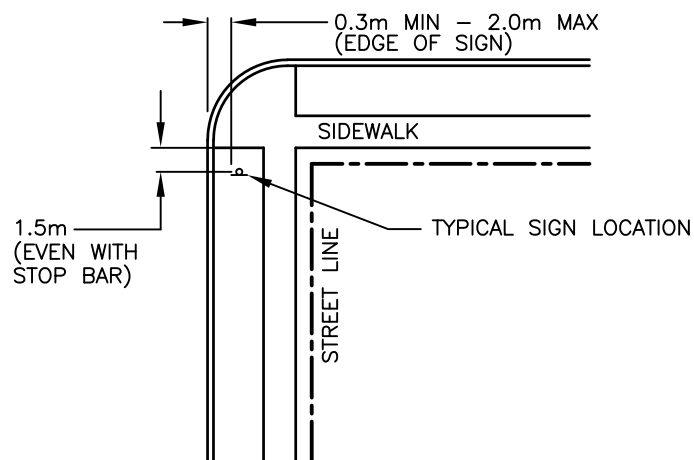

URBAN
WITH SIDEWALK

NOTE

1. SIGNS TO FIT STANDARD CAST ALUMINUM STREET NAME INSTALLATION BRACKETS WITH BOLTS ONLY. (NO ALLEN KEY BOLTS)
2. STOP SIGNS TO BE R_a-1 ON ALL ROADS
3. CONTACT ENGINEERING SERVICES FOR MORE SPECIFICATIONS IF REQUIRED ON SPECIALTY SIGNS.
4. DECORATIVE POSTS TO BE SET IN POURED CONCRETE FOOTING IN 250mm DIA SONOTUBE COMPRESSIVE STRENGTH OF CONCRETE TO BE 20MP_a AT 28 DAYS WITH 6% AIR ENTRAINMENT. ALL OTHER POSTS TO BE BACKFILLED WITH NATIVE MATERIAL.
5. ALL SIGNS AND HARDWARE MUST BE SECURE.
6. WHERE NO CURB EXISTS, SIGN POST TO BE INSTALLED 2m TO 4m FROM EDGE OF PAVEMENT.

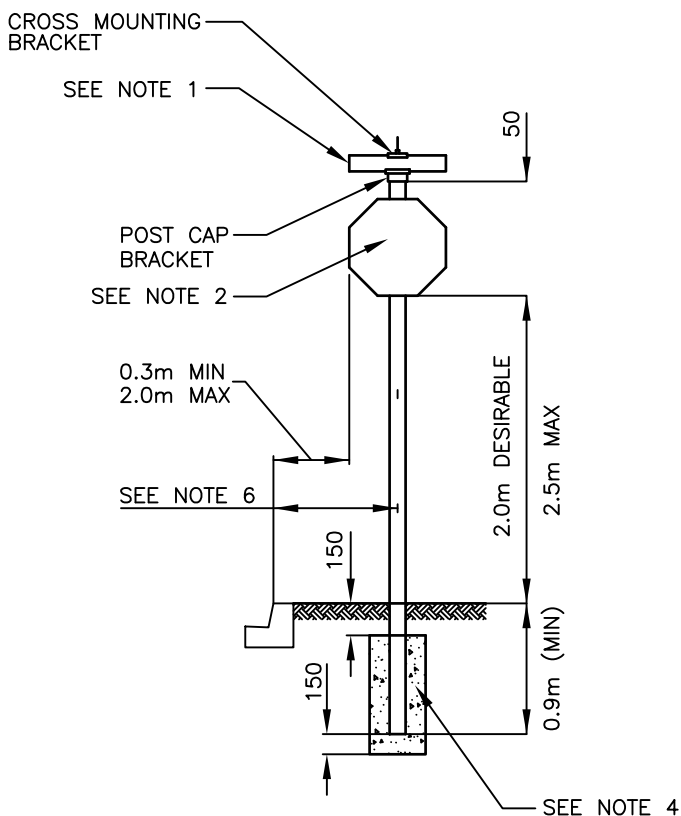

CITY OF OSHAWA

CHK'D: *S.S.*

APP'D: *S.H.*

DATE: JAN. 14, 2014

STREET SIGN LOCATION DETAIL

REVISION No.

DATE: JAN. 14, 2014

OS-406